

FIG. 1

204260" E908200T

FIG. 2

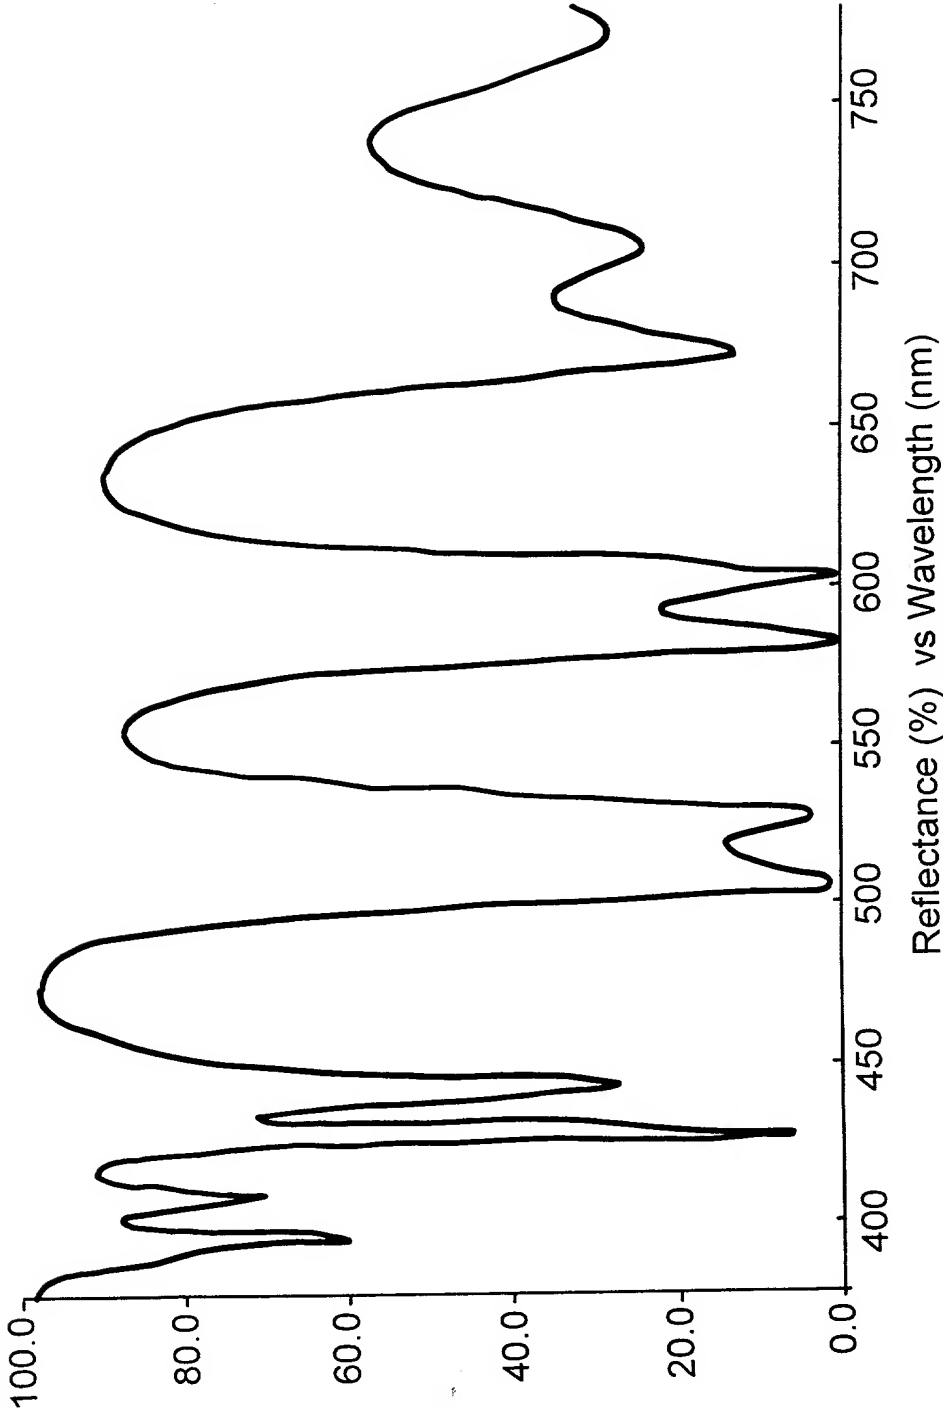


FIG. 3

DRAWING 4
EFFECT OF ANGLE ON MULTILAYER COATING
3/14/01, B.L.


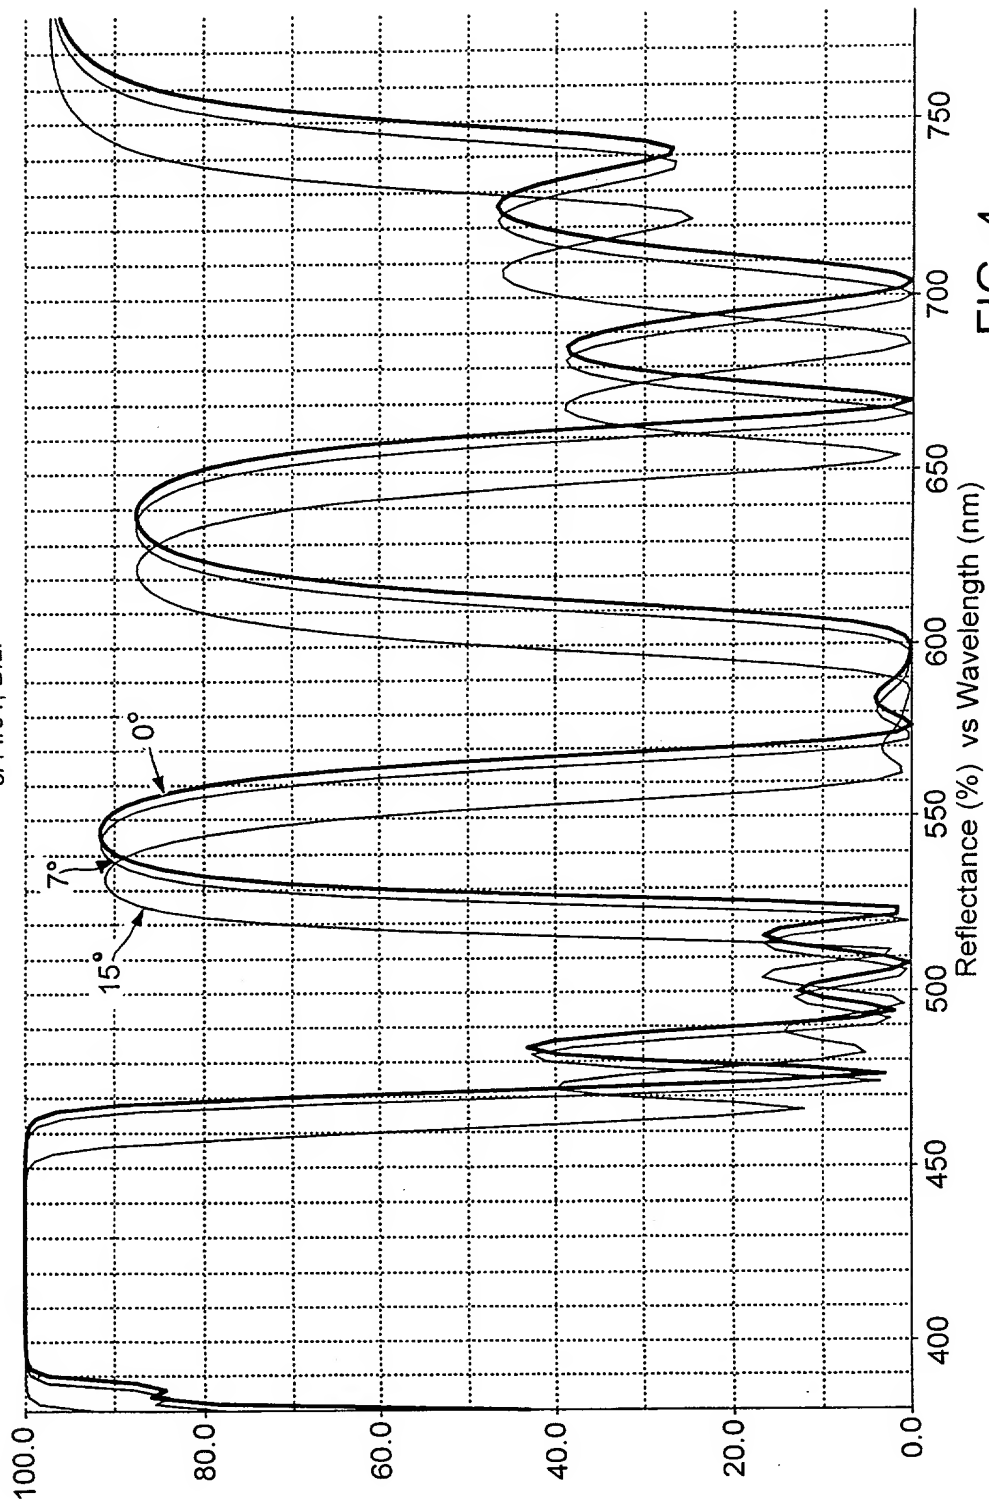


FIG. 4

DRAWING 5

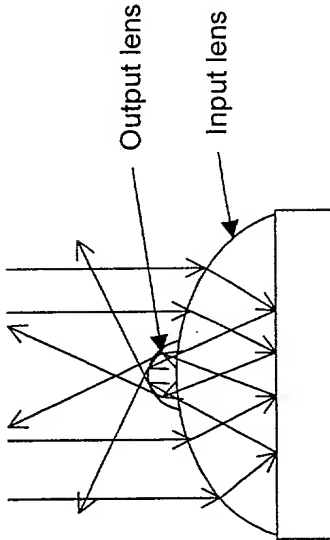

Front View of Entire Screen

FIG. 5B

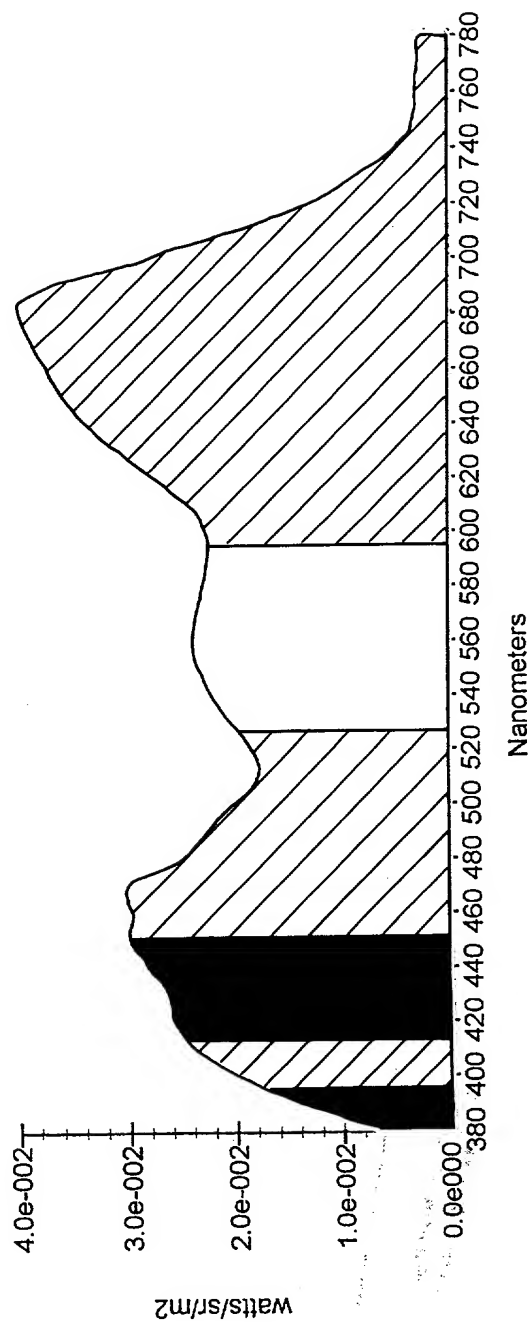


FIG. 6

DRAWING 7
MINIMAL RISK CONSTRUCTION
3/15/01, B.L.

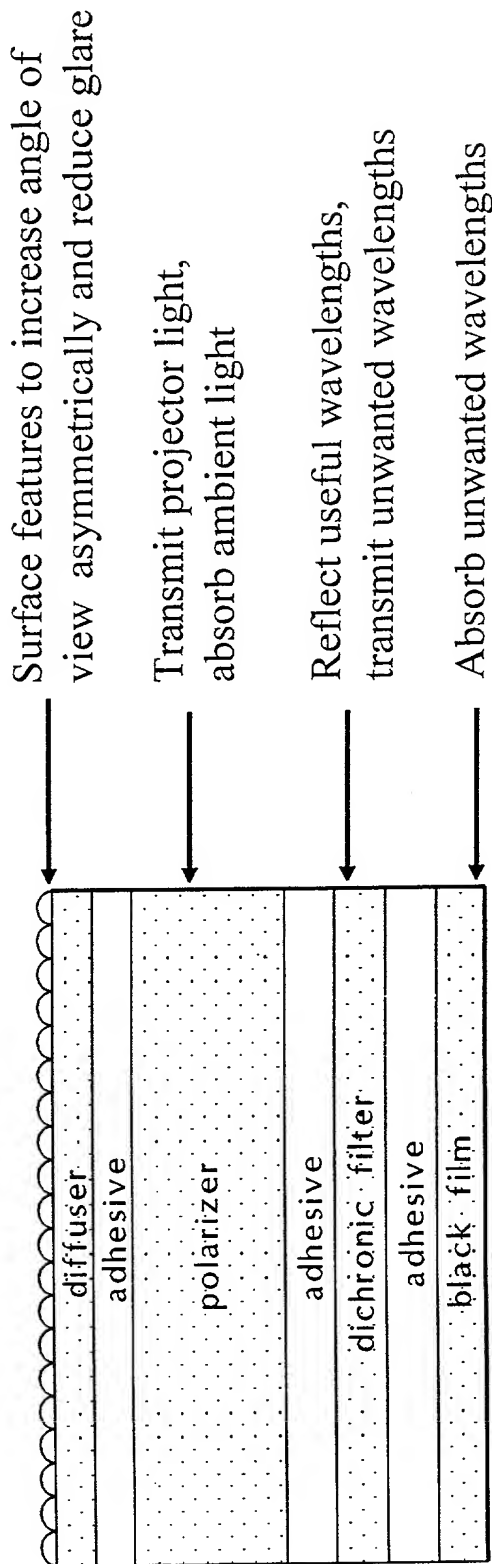


FIG. 7

DRAWING 8
ADVANCED CONSTRUCTIONS
5/31/01, B.L.

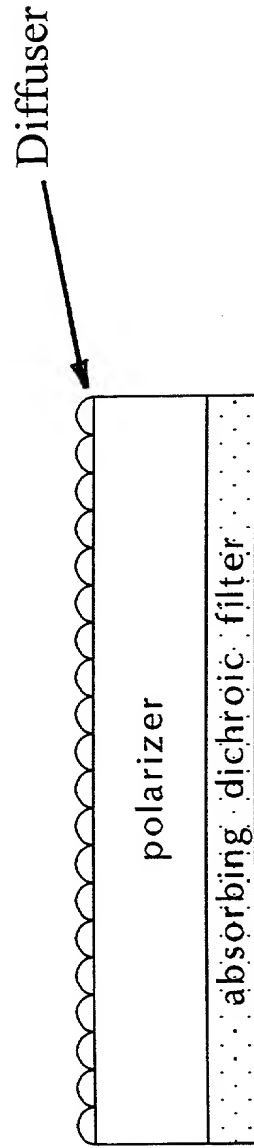


FIG. 8A

a. Front surface diffuser only


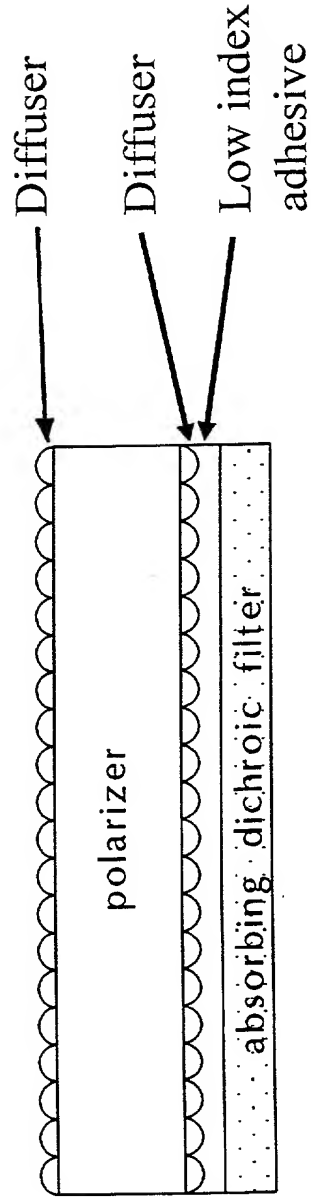


FIG. 8B

b. Front surface diffuser and immersed diffuser

DRAWING 9
EXAMPLE SPECTRUM OF
FILTERED PROJECTOR LIGHT
10/19/00, B.L.

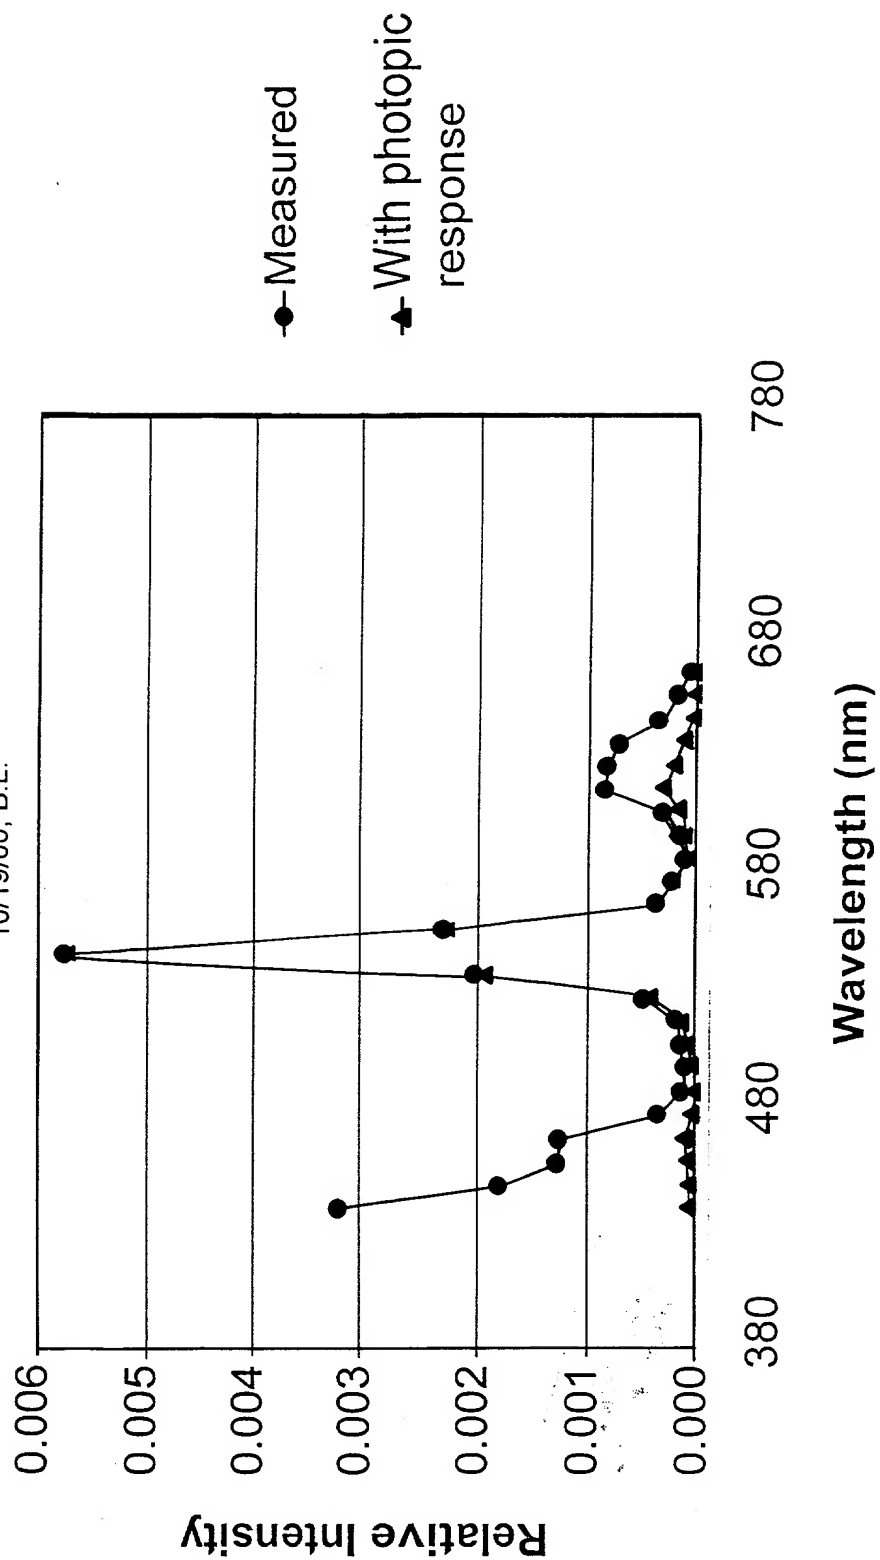

● Measured
▲ With photopic response

With photopic response

Wavelength (nm)

FIG. 9

DRAWING 10
 COLOR CHART
 10/19/00, B.L.

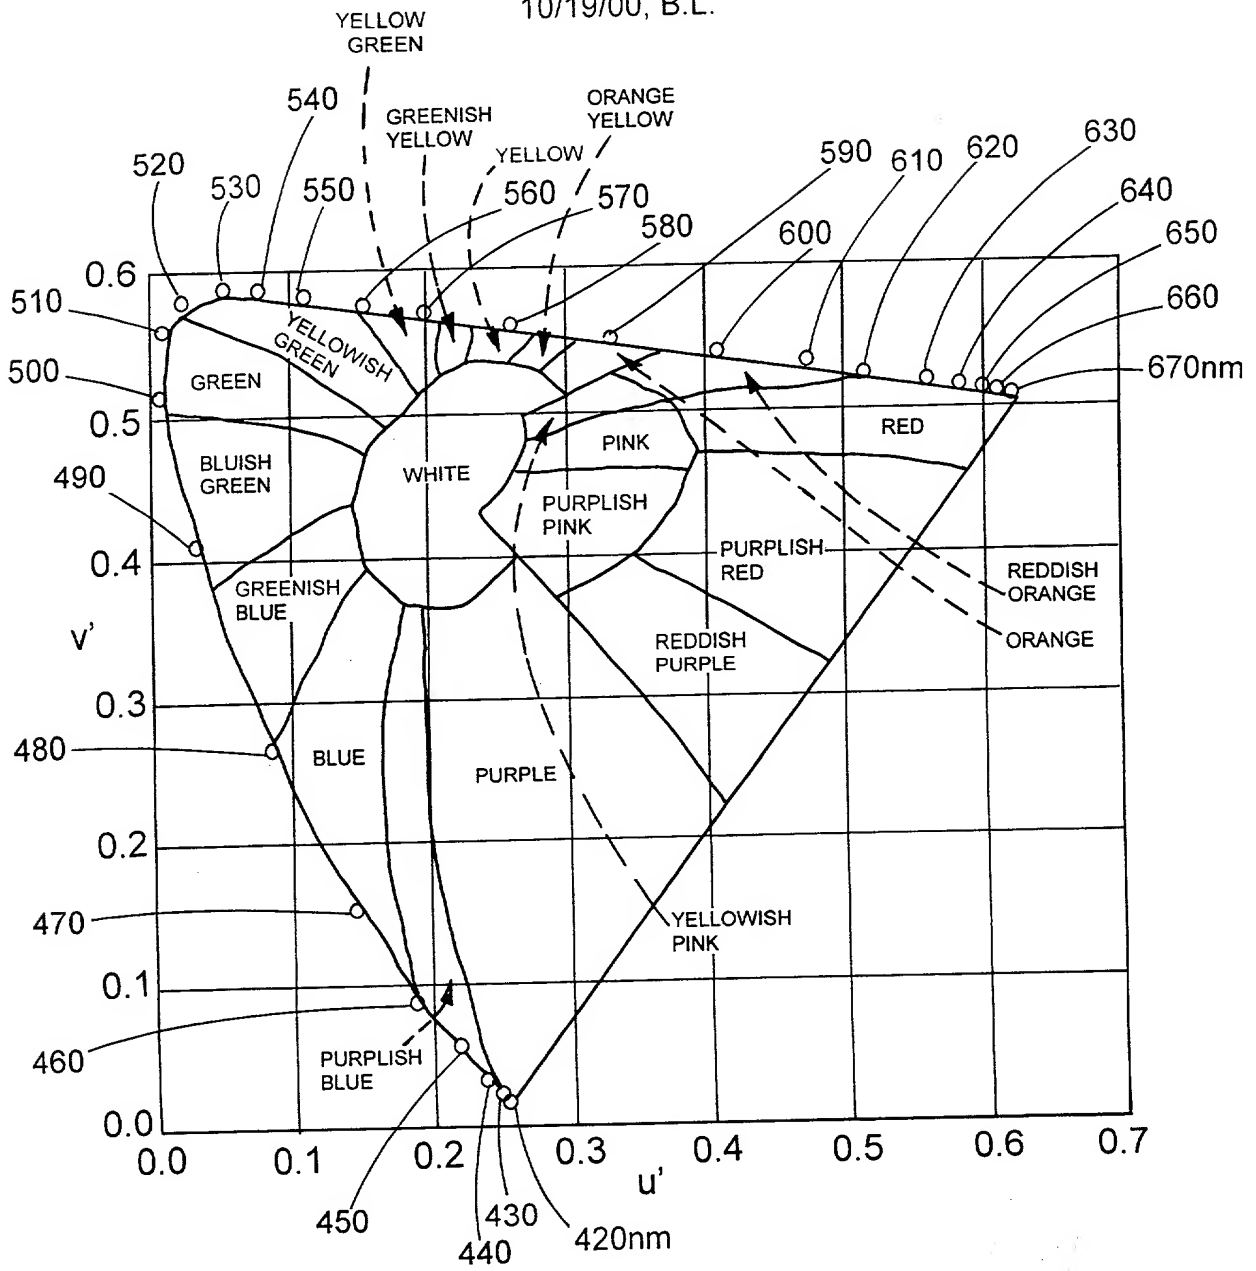


FIG. 10

DRAWING 11
IMPROVED COLOR PERFORMANCE
3/15/01, B.L.

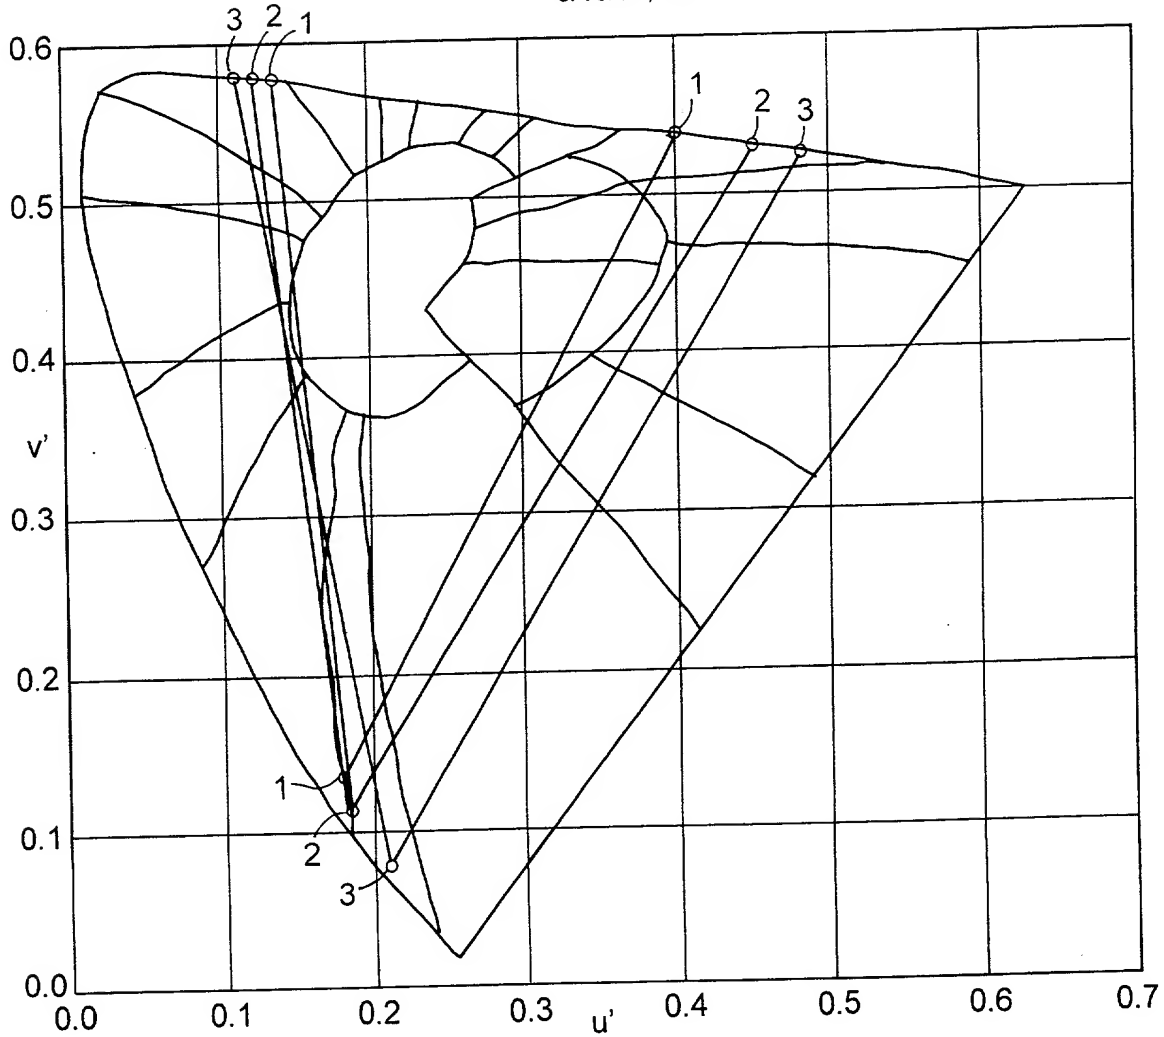


FIG. 11

- 1= projector on white screen
- 2= filtered projector on white screen
- 3= filtered projector on new screen



FIG. 12